

Ref.: 502356



## ENCLOSED HOSE REEL, RM-12CLX SERIES, 15 M, 3/8", GREASE / HYDRAULIC OIL

Totally enclosed reel in steel plate finished in polyester resin. Positionable mounting bracket in steel plate with 2 drill patterns: 220 x 130 mm and 270 x 150 mm. Ratchet system in polymer to reduce noise. Large service panel allows hose reel maintenance without dismounting it. Wide hose outlet aids rolling, reduces piling up and premature wear of the hose. Fatigue resistant steel spring for years of durable performance and even load when pulling and recoiling the hose. Spool mounted on two permanent lubricated and sealed ball bearings to reduce torque load on spring for smooth retraction and longer life.. Hose reels with hose include 0,8 m inlet hose. Model with 15 m 3/8" hose for GREASE / HYDRAULIC OIL. Instruction book: 850840.

### Technical data

### Documentation

### More information

<b>Compatible fluids</b>	Grease, Oil
<b>Hose in diameter</b>	3/8"
<b>Hose length</b>	15 m (49,21 ft)
<b>Fluid Inlet</b>	3/8" BSP (M)
<b>Fluid outlet</b>	1/4" BSP (M)
<b>Working Pressure</b>	280 bar (4060 psi)
<b>Installation options</b>	Floor, Wall, Ceiling, Tank
<b>Bare reel part number</b>	502359
<b>Weight</b>	24,45 kg (54 lb)

### Technical data

### Documentation

### More information

## Instruction manuals

850840 Instruction book: Enclosed hose reel, RM-12CLX series (PDF)

[Download](#)

## Catalogs

Product catalogue: REELS, 2023 EN (PDF)

[Download](#)

## Spare parts

Spare part document: RM12CLX03 502350 (PDF)


[Download](#)

### Technical data

### Documentation

### More information

mm (in)	
A	500 (19 17/25")
B	510,7 (1/10")
C	509,4 (20")
D	196,8 (7 37/50")
E	140 (5 1/2")
F	270 (10 31/50")
G	220 (8 3/5")
H	130 (5 3/25")
I	150 (5 9/10")
J	Ø10 (3/8")

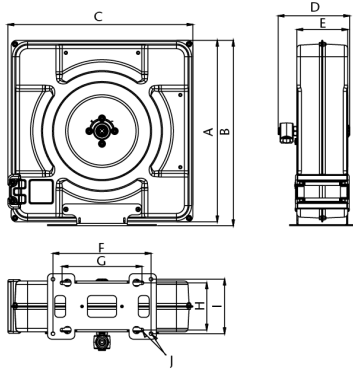

## Models

Code	Compatible Fluids	Hose In Diameter	Hose Length	Working Pressure
502356	Grease, Oil	3/8"	15 m (49,21 ft)	280 bar (4060 psi)
502351	Grease, Oil	3/8"	10 m (32,81 ft)	280 bar (4060 psi)
502350	Grease, Oil	1/4"	10 m (32,81 ft)	350 bar (5075 psi)
502257	Oil	1/2"	15 m (49,21 ft)	160 bar (2320 psi)
502252	Oil	1/2"	10 m (32,81 ft)	160 bar (2320 psi)
502157	Air, Water	1/2"	15 m (49,21 ft)	15 bar (220 psi)
502156	Air, Water	3/8"	15 m (49,21 ft)	15 bar (220 psi)
502151	Air, Water	3/8"	10 m (32,81 ft)	15 bar (220 psi)