

Ref.: 507122



INDIVIDUALLY ENCLOSED HOSE REEL, RM-12CL SERIES, 15 M, 1/2", AIR / WATER / COOLANT

Corrosion resistant aluminium enclosure form a very rigid and stable structure, with light weight and attractive design. Fatigue resistant steel spring for years of durable performance and even load when pulling and recoiling the hose. Full port shaft and swivel for no restrictions. Spool mounted on two permanent lubricated and sealed ball bearings to reduce torque load on spring for smooth retraction and longer life. Large effective radial latching area for easier operation. Positionable mounting brackets to accommodate any method of mounting. Two large lateral service windows facilitate common maintenance operations. Hose reels with hose include 0,8 m inlet hose.system in polymer to reduce noise. Large service panel allows hose reel maintenance without dismounting it. Wide hose outlet aids rolling, reduces piling up and premature wear of the hose. Fatigue resistant steel spring for years of durable performance and even load when pulling and recoiling the hose. Spool mounted on two permanent lubricated and sealed ball bearings to reduce torque load on spring for smooth retraction and longer life.. Hose reels with hose include 0,8 m inlet hose. Model with 15 m 1/2" hose for AIR / WATER / COOLANT. Instruction books: 850820 and 836823.

Technical data

Documentation

More information

Compatible fluids	Air, Water, Coolant
Hose in diameter	1/2"
Hose length	15 m (49,21 ft)
Fluid Inlet	1/2" BSP (M)
Fluid outlet	1/2" BSP (M)
Working Pressure	15 bar (220 psi)
Installation options	Floor, Wall, Ceiling, Tank
Bare reel part number	507919
Weight	21,4 kg (47,2 lb)

Technical data

Documentation

More information

Instruction manuals

836823 Instruction book: Template for hose reel installation (PDF)

[Download](#)

850820 Instruction book: Individually enclosed hose reel, RM-12CL series (PDF)

[Download](#)

Catalogs

Product catalogue: REELS, 2023 EN (PDF)

[Download](#)

Spare parts


Spare part document: RM12CL01 507101 (PDF)

[Download](#)

Technical data

Documentation

More information

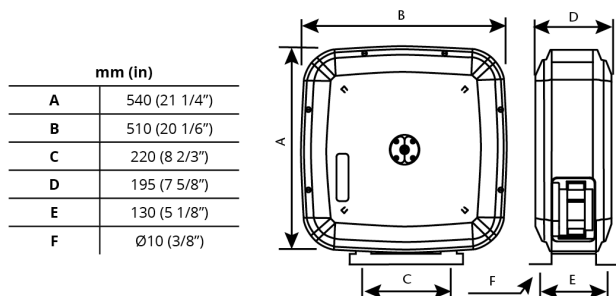

Models

Code	Compatible Fluids	Hose In Diameter	Hose Length	Working Pressure
507122	Air, Water, Coolant	1/2"	15 m (49,21 ft)	15 bar (220 psi)
507782	Coolant, Windscreen washer, AdBlue/DEF	1/2"	15 m (49,21 ft)	20 bar (290,08 psi)
507762	Coolant, Windscreen washer, AdBlue/DEF	1/2"	10 m (32,81 ft)	20 bar (290,08 psi)
507503	Waste oil	5/8"	6 m (19,69 ft)	-0,9 bar (-13,05 psi)
507421	Water	3/8"	15 m (49,21 ft)	170 bar (2470 psi)
507321	Grease, Oil	3/8"	15 m (49,21 ft)	280 bar (4060 psi)
507301	Grease, Oil	3/8"	10 m (32,81 ft)	280 bar (4060 psi)
507300	Grease, Oil	1/4"	10 m (32,81 ft)	350 bar (5075 psi)
507222	Oil	1/2"	15 m (49,21 ft)	160 bar (2320 psi)
507202	Oil	1/2"	10 m (32,81 ft)	160 bar (2320 psi)
507121	Air, Water, Coolant	3/8"	15 m (49,21 ft)	15 bar (220 psi)
507101	Air, Water, Coolant	3/8"	10 m (32,81 ft)	15 bar (220 psi)
507311	Grease, Oil	3/8"	18 m (59,06 ft)	280 bar (4060 psi)
507212	Oil	1/2"	18 m (59,06 ft)	160 bar (2320 psi)