

With hydraulic cylinder and steel cable synchronization, the TLT440 four-post lift tool guarantees a stable and smooth lifting and lowering. Two-layer concealed plate structure provides excellent synchronizing performance with the horizontal precision of 1mm.




## FEATURES

- Full-range mechanical safety protection by using the safety latches, manual lowering operation.
- Cylinder travel limit device effectively protects cylinder and extends its lifespan.
- Cable rupture safety system effectively protects vehicle from overturn.
- Electric controlled lifting and lowering safe and easy operation.
- Four connected steel cables force synchronized movement of the lift, effectively prevent vehicles from sloping.
- Distance between two platforms is adjustable for the vehicles with different wheel track.
- Passed national standards and CE certificated.

## SPECIFICATION

WORKING TEMPERATURE	0°C~+40°C
RELATIVE HUMIDITY	Temperature +30°C, relative humidity 80%
STORAGE TEMPERATURE	-25°C~+55°C
HEIGHT ABOVE SEA LEVEL	No more than 2000m
RATED LOAD	4000kg
LIFTING HEIGHT	1650mm
INITIAL HEIGHT	170mm
LIFTING TIME	≤60S
LOWERING TIME	≥20S ≤40S
MAX DRIVE-ON WIDTH	3045mm

PLATFORM LENGTH	4240mm
PLATFORM WIDTH	500mm
OVERALL WIDTH	3445mm
OVERALL HEIGHT	2172mm
MOTOR POWER	2.2KW
MOTOR VOLTAGE	3 phase/380V Singlephase/220V
WORKING NOISE	≤70dB(A)
WORKING OIL PRESSURE	16MPa
WORKING AIR PRESSURE	0.5~0.7MPa

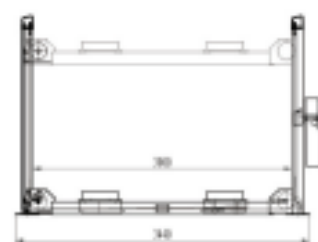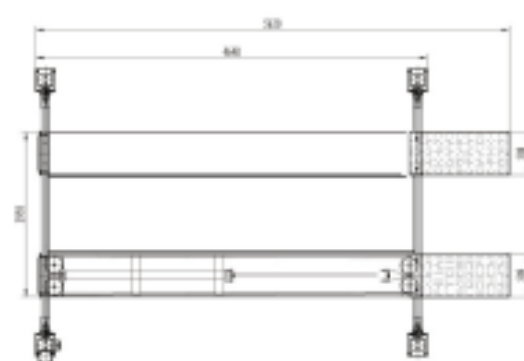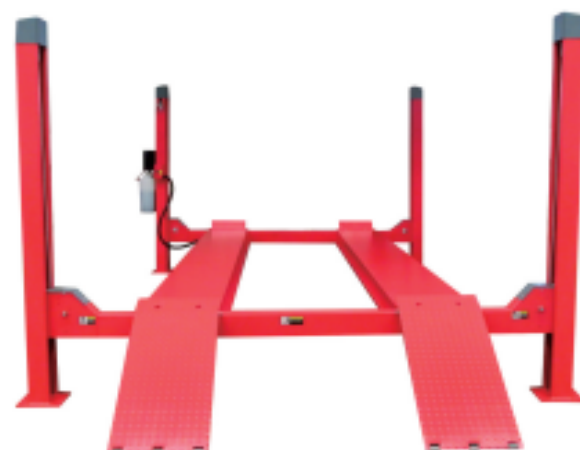

Overall Size

## CONFIGURATION

		BASIC	CE STANDARD
DRIVE ON RAMP ASSEMBLY	508X1060mm	●	
UNLOCKING SYSTEM	Manual lowering device	●	
POWER UNIT	Domestic 2.2KW 12L	●	
ANTI-EXPLOSION VALVE		●	●
LIFTING PAD	Button box, Anti-toe guard, cylinder travel limit device		●
LOOSE ROPE FORCED BALANCE SYSTEM			●
COLOR	Launch red, Launch grey, Volkswagen blue, Hyundai blue, GM blue(Buick blue)	●	●
WARRANTY	1 year	●	●