

VAUXHALL/OPEL

Petrol Turbo Engine Timing Set

9AT1007E

- The setting & locking set covers a wide range of Vauxhall/Opel and Chevrolet petrol engine.
- Include the necessary tool for setting and locking the camshaft and crankshaft for locking the timing chain tensioner.



2.4



1 / 4

7
PC.



MODEL:

Cadillac : ELR (2014).

Chevrolet :

Aveo (2011-2015), Cruze (2011-2015),

Volt (2012-2014), Trax (2013-2015),

Orlando (2011-2015).

Holden: Volt (2012-2014).

Vauxhall / Opel:

Agila (2000-2003), Agila-B (2008-2010),

Adam (2012-2015), Ampera (2011-2015),

Corsa-C (2000-2014), Corsa-D (2006-2014),

Insignia (2011-2015), Meriva-B (2010-2015),

Mokka (2012-2015), Zafira-C Tourer (2012-

2015),

Cascade (2013-2015), Astra-J (2009-2015).

1.0 / 1.0 Ecotex

A10XEP

1.2 / 1.2 Ecotex

A12XEL, A12XER, LWD/A12XEL, L2Q/A12XEL,

LWD/B12XEL

1.4 / 1.4 Ecotex

A14XER, LUJ/A14NET, LDD/A14XEL, LDD/

A14XER,

ENGINE : LDD/A14XEL, A14XEL, L2Z/A14XEL, LDD/

B14XEJ,

LDD/B14XEL, LDD/B14XER, LUJ/B14NEH,

LUJ/B14NEL, LUJ/B14NET, LDD, LUU,



LUH/A14NEL

1.4 Turbo

LUJ/A14NEL, LUJ/A14NET, LUJ/B14NET




1.6

LDE/A16XER, LDE/B16XER

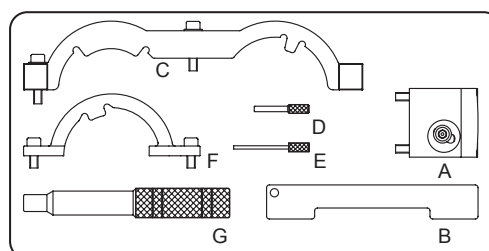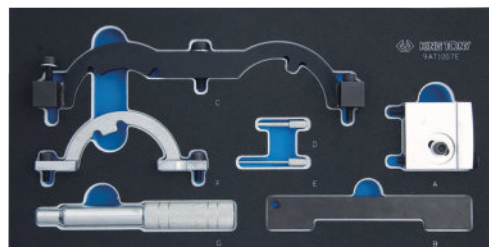

CONTENTS:

- A - Inlet Camshaft Adjusting Tool
- B - Camshaft Locking Plate
- C - Camshaft Sensor Locating Tool
- D - Chain Tensioner Locking Pin 4.0mm
- E - Chain Tensioner Locking Pin 2.5mm
- F - Camshaft Sensor Locating Tool
- G - Crankshaft Locking Pin



VAUXHALL/OPEL

Petrol & Diesel Engine Tensioner Adjustment Wrench (Via Water Pump)

9AT1202

- The set includes 41mm and 46mm tension adjust wrench
- Suitable for Vauxhall / Opel and Chevrolet engine



695



6 / 24

MODEL:

9AT1202 - A(46MM)

Petrol / 1.8 and 2.0 S.O.H.C

Astra F, Calibra, Frontera C18NZ, C20NE

Diesel / 1.6D and 1.7D

Astra, Cavalier, Vectra 16DA, 17D


9AT1202 - B(41MM)

Petrol / 1.2 / 1.4 / 1.6 S.O.H.C

Corsa B / C , Combo, Astra-F, Vectra-B

C12NE, X12SZ, C14NZ, X14NZ, C14SE

X14SZ, X16SZ, X16SZR, Z16SE



CONTENTS :

- A - tension adjustment wrench (46mm)
- B - tension adjustment wrench (41mm)

